


Framing for Exterior Door "A"

Wire Size	Min. Size	Max. Size	Min. Size	Max. Size
10A	#10	#10	#10	#10
10B	#10	#10	#10	#10
15A	#10	#10	#10	#10
15B	#10	#10	#10	#10
20A	#10	#10	#10	#10
20B	#10	#10	#10	#10

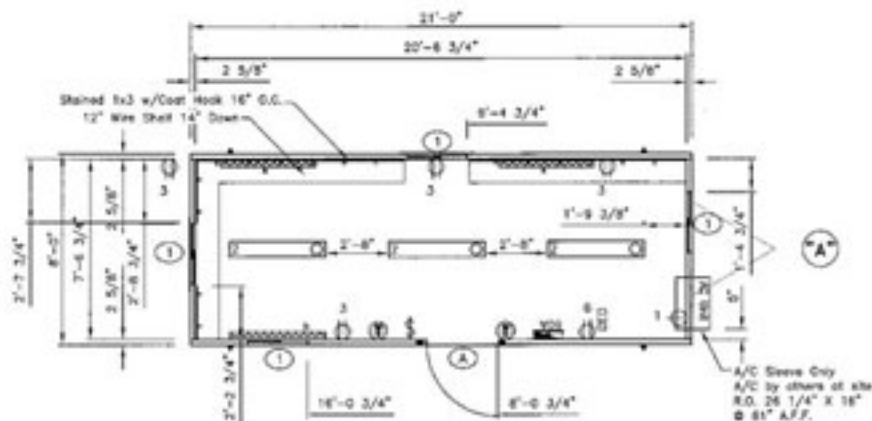

DRAWING LEGEND

SYMBOL	QTY	DESCRIPTION
▶	2	Over the FLOOR hurricane straps/ Tie down locations
■	1	120/240 electric panel
▬▬▬▬▬▬	3	120V Electric 48\"/>
Ⓢ	2	Thermostat (+54\"/>
⊕	4	120V very duplex grounding type (+18\"/>
⊕Ⓢ	1	120V very duplex grounding type on Dedicated Circuit (+18\"/>
⊕Ⓢ	1	120V very single A/C Recept (+18\"/>
Ⓢ	1	120V very toggle type (+48\"/>
Ⓢ	3	120V 4\"/>

QTY	Symbol	Description	Area	Unit	Weight	Volume	Cost	Material	Notes
1	▶	Over the FLOOR hurricane straps	1	sq ft	1.00	1.00	1.00	1.00	1.00
1	■	120/240 electric panel	1	unit	1.00	1.00	1.00	1.00	1.00
3	▬▬▬▬▬▬	120V Electric 48\"/>	3	sq ft	1.00	3.00	3.00	3.00	3.00
2	Ⓢ	Thermostat (+54\"/>	2	unit	1.00	2.00	2.00	2.00	2.00
4	⊕	120V very duplex grounding type (+18\"/>	4	unit	1.00	4.00	4.00	4.00	4.00
1	⊕Ⓢ	120V very duplex grounding type on Dedicated Circuit (+18\"/>	1	unit	1.00	1.00	1.00	1.00	1.00
1	⊕Ⓢ	120V very single A/C Recept (+18\"/>	1	unit	1.00	1.00	1.00	1.00	1.00
1	Ⓢ	120V very toggle type (+48\"/>	1	unit	1.00	1.00	1.00	1.00	1.00
3	Ⓢ	120V 4\"/>	3	unit	1.00	3.00	3.00	3.00	3.00

DOOR & WINDOW SCHEDULE

SYMBOL	QTY	DESCRIPTION	ROUGH OPENING
Ⓐ	1	36x80 standard vinyl clad door w/drum frame and 55/10 safety gazed lite slay chain, knob lock set, weatherstripping and threshold	36 x 80 see R.O. Detail
Ⓒ	4	36x14 horizontal slider w/aluminum mid frame single obscured glass and bug screen	36 x 14 x 1 1/4 x 1/4 @ 66 3/4\"/>