


FLOOR PLAN

Unit Notes

ITEM	CONSTRUCTION	INSULATION/COVERING	COLOR
Floor	2-4 RD. SPF @ 16" OC	R-10U 1/2" VINYL	SEASIDE
Walls	2-2 SFF - 2"100 GRADE 7-2" HIGR	R-7U 5/8" PANELING	ULTRA DM
Ceiling		1/2" REC-FIN G-F	WHITE
Roof	30# RDW TRUSS 16" OC	R-10U 20 GA GALVANIZED	
EXTERIOR FINISH			
DR BLIND REAR VERTICAL SMOOTH ALUMINUM (4# S.S. PAINTED SCREWS)			POLAR WHITE
DR ICE ALUMINUM			POLAR WHITE (BOTTOM & CORNER) TV GREEN TOP

DOOR & WINDOW SCHEDULE

SYMBOL	QTY	DESCRIPTION	ROUGH OPENING
(A)	1	3680 VINYL-CLAD WITH 30" WINDOW, STAY DOWN VEYED LOCKSET & DEADBOLT PROVIDE ALUM. HING BUTTER OVER BODY EXTENDING 3" BOTH SIDES OF FRAME	38-80-3/4 FUR TO 26-80 PER DETAIL
(B)	1	3080 HOLLOW CORE WITH WOOD JAMB, 3-1/2 PAIR HINGED & PASSAGE LATCHSET	38" X 82 1/2"
(C)	7	4627 HORIZ SLIDER W/ ALUM FRAME, SINGLE GLASS, ALUM BLINDS & SCREEN @ 48" AFF	46 3/4 X 27 1/4"

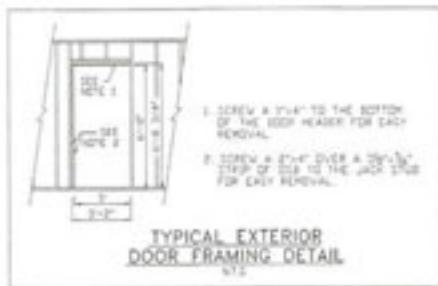

DO NOT INSTALL WALL CLEAT UNDER THE CENTER 20" OF THE DESKTOP TO ALLOW FOR A FILE CABINET TO BE INSTALLED AT SITE (TYPICAL BOTH ENDS).

NOTES

1. GALVANIZED UNDERBELLY.
2. DECKING 3/4" T&G PLYWOOD.
3. SOLID REAR CROSSMEMBER W/ R.V. TAG LIGHTS FASTENED TO FRAME (CONICAL WOOD).
4. ALUM. HING OUTTERS, NO SEAMS OVER D & W.

DRAWING LEGEND

SYMBOL	QTY	DESCRIPTION
(Panel symbol)	1	125A, 120-240V ELECTRICAL PANEL
(Light fixture symbol)	4	4' DOUBLE TUBE FLUORESCENT LIGHT WITH DIFFUSER
(Receptacle symbol)	6	15A, 120V DUPLEX RECEPT @ 36" AFF (UND)
(A/C symbol)	2	25A, 120V SINGLE A/C RECEPT AT 52" AFF (UND)
(Switch symbol)	2	120V SWITCH @ 48" AFF (UND)
(J-box symbol)	2	J-BOX WITH 3/4" EMT CONDUIT STUBBED THRU FLOOR
(Thermostat symbol)	3	THERMOSTAT @ 54" AFF (UND)
(Heater symbol)	5	120V, 1 KW, 4' BASEBOARD HEATER @ 6" AFF (UND)