


EXT. DOOR FRAMING DETAIL

1. SCREW A 1"x4" TO THE BOTTOM OF THE DOOR HEADER FOR EASY REMOVAL.
2. SCREW A 2"x4" OVER A 2"x4" STRIP OF LGS TO THE JACK STG FOR EASY REMOVAL.

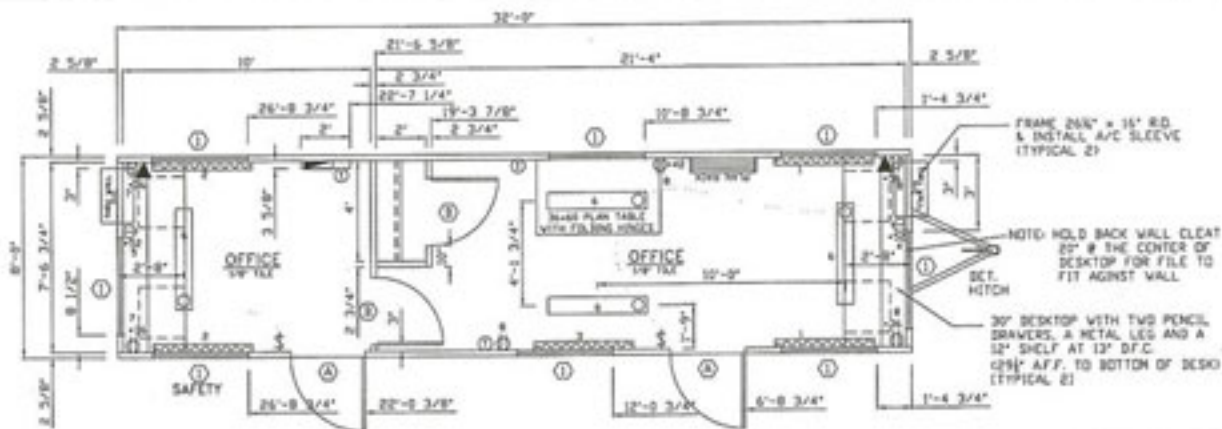

FLOOR PLAN

Unit Notes

ITEM	CONSTRUCTION	INSULATION/COVERING	COLOR	
Floor	2x4 @ 24" SP. @ 15' O.C.	R-11U	1/2" VINYL	SEASIDE
Walls	2x2 SP., STUD GRADE, 7'-0" HIGH	R-70	5/32" PANELING	ULTRA DAK
Ceiling			1/2" PRC-FIN. GYP.	WHITE
Roof	20# 30V TRUSSES 16' O.C.	R-11U	20 GA GALVANIZED	
EXTERIOR SIDING/TRIM				
	019 180 USC RE-SA VERTICAL SMOOTH ALUMINUM (WB S.S. PAINTED SCREWS)		POLAR WHITE	
	019 RCE ALUMINUM		POLAR WHITE (BOTTOM & CORNERS) / IVY GREEN (TOP)	

DOOR & WINDOW SCHEDULE

SYMBOL	QTY	DESCRIPTION	ROUGH OPENING
(A)	2	3680 VINYL-GLAZ WITH 10" WINDOW, STAY DOWN KEYED LOCKSET & DEADBOLT PROVIDE ALUM. MINI GUTTER OVER DOOR EXTENDING 2" BOTH SIDES OF FRAME	36x80-3/4 FUR TO 36x80 PER DETAIL
(B)	2	3080 HOLLOW CORE WITH WOOD JAMB, 1-1/2" PAIR HINGES & PASSAGE LATCHSET	32 X 82 1/2
(C)	8	4627 HORIZ. SLIDER W/ ALUM. FRAME, SINGLE GLASS, ALUM. BLINDS & SCREEN @ 42" AFF	46 1/4 X 27 1/4

NOTES

1. GALVANIZED UNDERBELLY.
2. DECKING 3/4" T&G PLYWOOD.
3. SOLID REAR CROSSMEMBER W/ R.V. TAIL LIGHTS FASTENED TO FRAME (CONCEAL WIRING).
4. ALUM. MINI GUTTERS, NO SEAMS OVER WINDOWS OR DOORS.

DRAWING LEGEND

SYMBOL	QTY	DESCRIPTION
(E)	1	125A, 125V/240V ELECTRICAL PANEL
(F)	4	4" DOUBLE TUBE FLUORESCENT LIGHT WITH 30" FUSER
(G)	6	15A, 120V DUPLEX RECEPT @ 58" AFF (UND)
(H)	2	25A, 120V SINGLE A/C RECEPT AT 52" AFF
(I)	2	120V SWITCH @ 48" AFF
(J)	2	J-BOX WITH CONDUIT STUBBED THRU FLOOR @ 36" AFF
(K)	3	THERMOSTAT @ 54" AFF
(L)	5	120V, 1 KW, 4" BASEBOARD HEATER @ 6" AFF