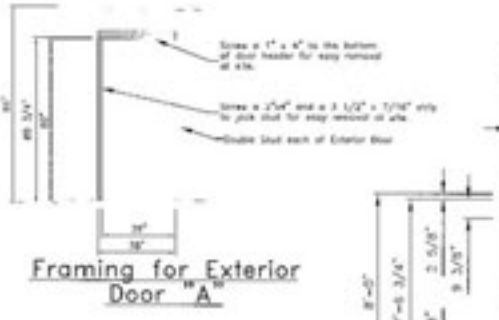

Framing for Exterior Door "A"

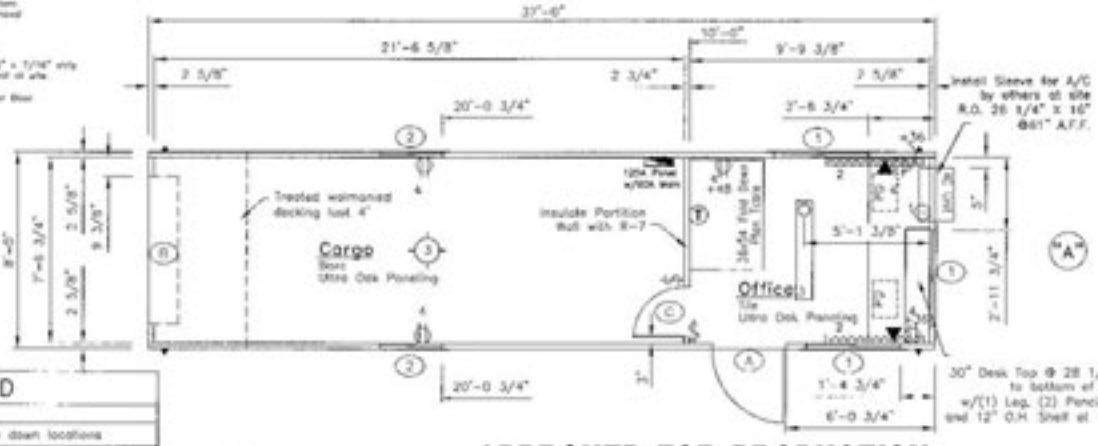

DRAWING LEGEND

SYMBOL	QTY.	DESCRIPTION
▸	2	Over the Floor hurricane straps/Tie down locations
	1	120/240 electric panel
	7	120V Electric 48" baseboard heater (+4" A.F.F.)
(T)	1	Thermostat (+54" A.F.F.)
	5	120V ivory duplex (grounding) type (+18" AFF unless noted)
	1	120V ivory single A/C Recept (+14" AFF)
◀	2	2x4-3dex w/3/4" conduit thru floor for phone/data (+36" AFF unless noted)
s/s	2	120V ivory toggle type (+48" AFF unless noted)
	1	120V 4' (2) tube surface mount w/diffuser
	1	120V Porcelain base incandecent light

DOOR & WINDOW SCHEDULE

SYMBOL	QTY.	DESCRIPTION	ROUGH OPENING
(A)	2	36x80 standard vinyl clad door w/risers, frame and 10x10 safety glazed lite ship chain, knob lock set, weatherstripping, miniguitter and threeshold	38 x 80 see R.O. Detail
(B)	1	72 X 68 Steel roll-up overhead w/miniguitter	72 x 68 1/2
(C)	1	24x80 hollow core door w/factory frame and passage knob set	24 5/8 x 81 5/8
(1)	3	46x27 horizontal slider w/aluminum mill frame single glass, blinds and bug screen	46 1/4" x 27 3/4" up 41 1/4" A.F.F.
(2)	2	30x14 horizontal slider w/aluminum mill frame single obscure glass and bug screen	30 1/4" x 14 3/4" up 54 1/4" A.F.F.

Electrical Riser Diagram

* 120/240v, 1PH 60HZ PANEL With 3 wire feeder 1 1/2" EMT conduit (3) #6 THW feeders #8 GRND

APPROVED FOR PRODUCTION

Module #

Area served: Main Breaker: 100A

Volts: 120/240

Panel Voltage: 1Ø, Panel Phase: 3

CKT#	Breaker size	Description	QTY	Voltage	Watts per item	Connected Load	Load Factor	Calculated Load	VA