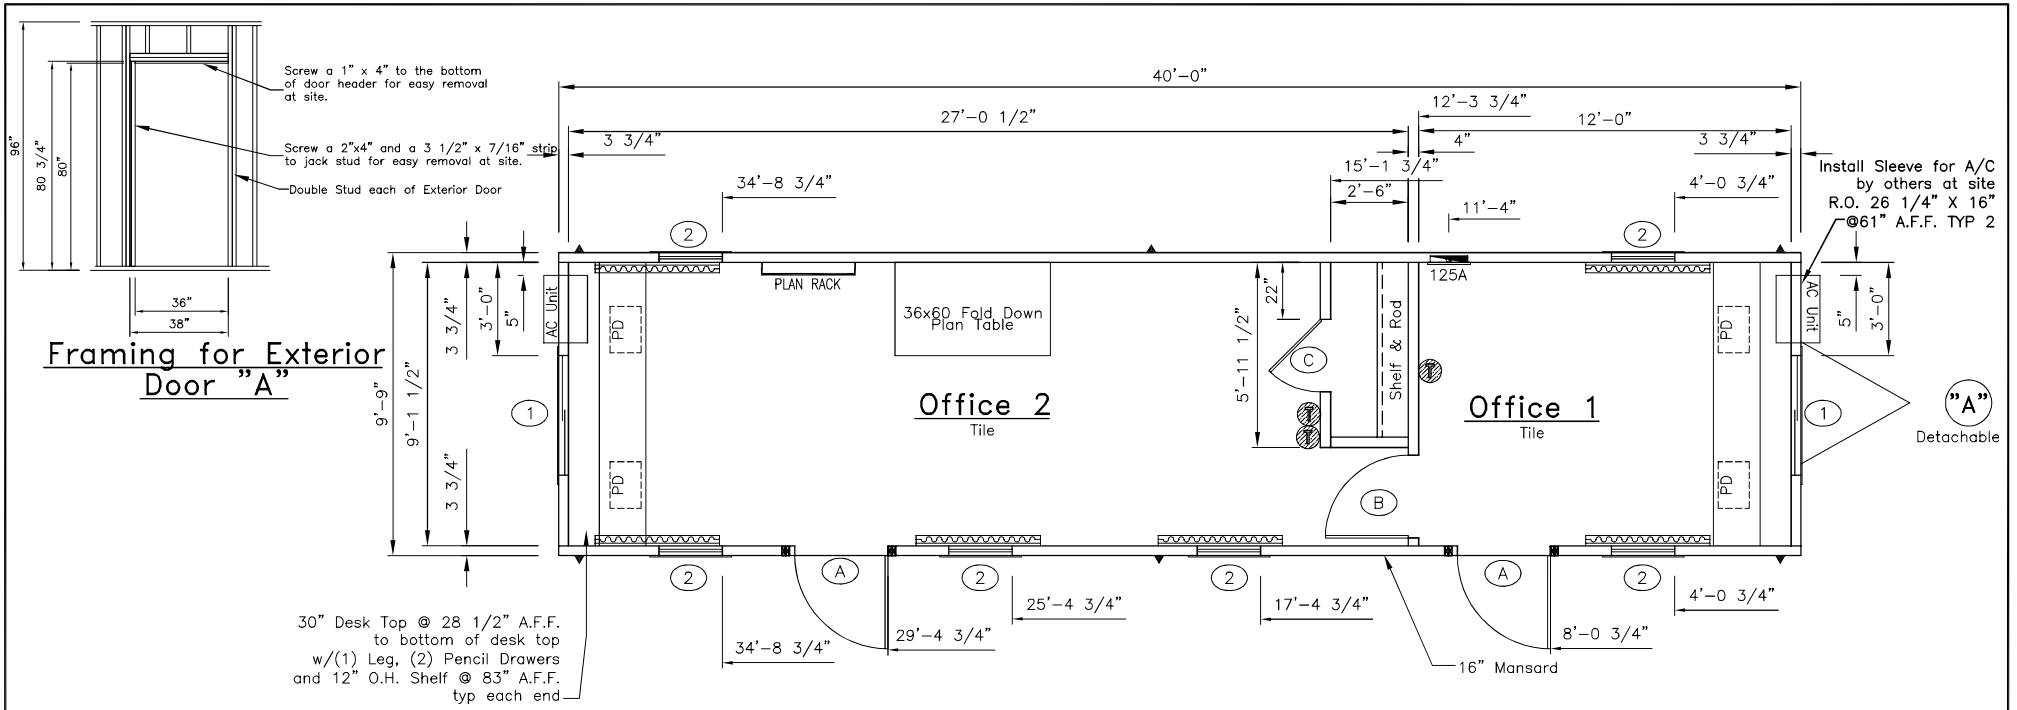

DRAWING LEGEND

SYMBOL	QTY.	DESCRIPTION
▶	3	Over the floor hurricane straps/Tie down locations
	1	120/240 electric panel (+30" A.F.F. to bottom of panel)
	6	120V Electric 48" baseboard heater (+4" A.F.F.)
	3	Thermostat (+54" A.F.F.)

DOOR & WINDOW SCHEDULE

SYMBOL	QTY.	DESCRIPTION	ROUGH OPENING
A	2	36x80 standard vinyl clad door w/alum. frame and 10x10 safety glazed lite stay chain. knob lock set, weatherstripping, minigutter and threashold	36 x 80 see R.O. Detail
B	1	30x80 hollow core door w/panel frame passage knob set and door stop	30 3/4" x 81 3/4"
C	1	26x80 hollow core door w/panel frame passage knob set and door stop	26 3/4" x 81 3/4"
1	2	46x27 horizontal slider w/aluminum mill frame single glass, blinds and bug screen	46 1/4" x 27 1/4" up 41 1/4" A.F.F.
2	6	24x53 vertical slider w/aluminum mill frame single glass, blinds and bug screen	24 1/2" x 53 1/2" up 26" A.F.F.

Dear John® Inc.
CUSTOM MODULAR, INC.
2224 Bloomingdale Drive
Bristol, Indiana 46507
PH: (574) 848-7300
FX: (574) 848-1950

ID	Revision	Date

Scale:	Drawn:	Date:	Plot Date:
1/4" = 1'-0"	BB	5/29/07	Feb 26, 2008

Serial Numbers:	Drawing Number:	DWG File Name:
	630	DJT1044FO.dwg

Approval Numbers: MT 20065910

Title: Dear John Trailers
10 x 44 Office (9'-9" x 40'-0")

Sheet Description: Production Floor Plan

Page #: A2